


# EBM12-OC

## OCEANOGRAPHIC BUOY

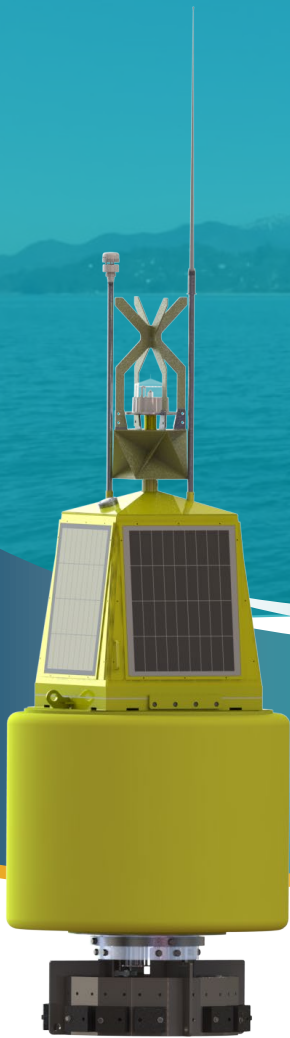

The **EBM-OC** buoys have been designed to measure various meteorological, oceanographic and environmental parameters through different combinations of sensors and integrate a data acquisition, processing and transmission system.

### FEATURES

The EBM-OC buoys incorporate a light and elastic float, manufactured with a solid core of closed-cell polyethylene foam sheet (no water absorption) covered with polyurethane elastomer.


This provides a buoy that is resistant to impacts and collisions and virtually unsinkable allowing preserving the integrity of the equipment (sensors and electronics) integrated in the buoy.

Using high-quality and resistant materials, they provide a long service life under the harshest marine conditions and are environmentally friendly as all the materials are recyclable.

Designed according to IALA Recommendations.



ANTI-VANDAL  
SECURITY



ELASTOMER  
FLOAT

### ADVANTAGES

- Integrates marine lantern, radar reflector, day mark and top mark so that they are conspicuous and highly visible to vessels.
- Watertight superstructure to house all electronic equipment and batteries.
- Integration of any commercially available sensor (weather stations, wave sensor, multiparameter water probes, ADCP and/or others).
- Datalogger designed for a complete management of the sensors and ability to interact with them individually through remote connection.
- Solar power system adapted based on the energy balance of the equipment for sufficient autonomy of the buoy without solar radiation.
- Anti-vandal protection and safety systems.
- Compact and light weight.

# EBM12-OC

## OCEANOGRAPHIC BUOY

### SUPERSTRUCTURE

<b>Material:</b>	Marine aluminium.
<b>Coating:</b>	Polyurethane marine paint resistant to UV light, colour according to IALA Recommendations.
<b>Top mark:</b>	According to IALA Recommendations.
<b>Radar reflector:</b>	10 m <sup>2</sup> RCS (X band).
<b>Marine lantern:</b>	Self-contained lantern, model MCL100, with up to 4nm luminous range (T=0.74). Other models available.
<b>Solar modules:</b>	Integrated with capacity up to 200 W.
<b>Batteries:</b>	Integrated with capacity up to 200 Ah.
<b>Supports:</b>	Antennas and sensors.
<b>Transponder:</b>	AIS AtoN Transponder (optional).

### FLOAT

<b>Diameter:</b>	1.2 m.
<b>Material:</b>	Closed-cell polyethylene foam.
<b>Coating:</b>	UV protected pigmented polyurethane elastomer.

### TAIL

<b>Material:</b>	Marine aluminium.
<b>Ballast weights:</b>	Treated steel, detachable.
<b>Mooring eye:</b>	1 no.
<b>Supports:</b>	Underwater sensors.
<b>Protection:</b>	Sacrifice anodes, to increase service life.

### DATALOGGER MODULE

- Allows the connection, setting, control and management in transparent mode of any type of sensor.
- All data is processed with quality controls and stored locally as well as transmitted through telemetry modules (Satellite, GSM/GPRS, radio, AIS, and others) to the Control Centre.

### MONITORING AND DATA MANAGEMENT SOFTWARE

- Remote management of sensors.
- Management and display of collected oceanographic data.

Specifications subject to change without previous notice. Other sizes available.  
For more information, refer to datasheet for datalogger and sensors.  
Possibility of implementing special configurations based on customer's requirements.

